


SR27 SERIES POWERED RAKES

Available for: SSV65 | SSV75 | SVL65 | SVL75

DIRTWORKING

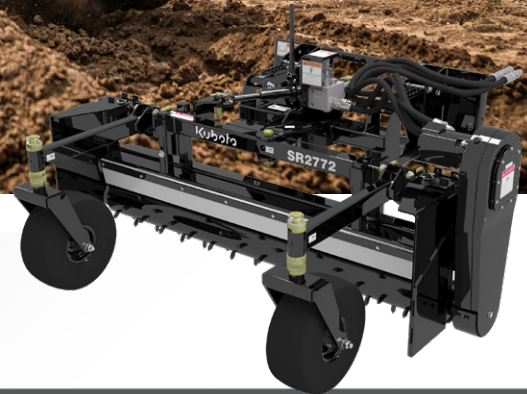

KEY FEATURES

- Float or rigid option
- Manual or hydraulic angle
- Cast chain housing
- Carbide tipped studs

Landscapers and housing contractors can prep and level ground for seeding, remove unwanted material and debris, and rejuvenate gravel driveways and lots. Powered Rakes make excellent rental tools.



Angle/float hitch: When operated in float, it allows the gauge wheels and rake to float with the contour of the ground.

Carbide tipped studs and bi-directional roller with variable speed enables more complete finish and control.



	SR2772	SR2790
Hydraulic Flow Requirements (lpm)	12-24 gpm (45.4-90.8)	15-24 gpm (56.8-90.8)
Hydraulic Pressure Range (MPa)	2250 to 3500 psi (15.51-24.13 MPa)	
Non-Angled Working Width (m)	72" (1.83)	90" (2.29)
Weight w/o options (kg)	1,005 lbs (455.9)	1,119 lbs (507.6)
Direction of Travel	Bi-directional	
Material Control Blade (cm)	2 Each - 1/2" x 5" (1.3x12.7) urethane	
Spike Roller (cm)	9-3/8" (23.8) Diameter with 3/4" x 1-1/2" (1.9x3.8) carbide tipped studs	
Roller Speed	Variable from 200-350 rpm	
Roller Side Bearings	Roller bearings	
Drive Chain	#50 Double continuous roller chain, high tensile, enclosed in oil bath	
Side Plates	Standard, removeable with storage rack	
Skid Shoes	Replaceable	
OPTIONS		
Hitch	Angle Hitch	Available
	Angle/Float Hitch	Available
Angle Actuator for Angling 20° Left or Right	Hydraulically (cm)	2" x 8" (5.08x20.32) Cylinder with solenoid valve
	Manually	Ratchet jack