



For Earth, For Life
Kubota

SVL

KUBOTA COMPACT TRACK LOADER SVL65-2S

Kubota's powerful and productive Compact Track Loader for those big jobs in small places.



*This information is sourced from overseas and may not necessarily apply locally. It is essential that you confirm specifications and other information with your local Kubota dealer.



Tight workspaces are no challenge for a loader packed with big features.


Here's the Compact Track Loader you've been waiting for. A smaller loader that will take you places... Easy to transport and works in tight places with a spacious cabin and power performance.

- **SUPERIOR OPERABILITY**
- **COMPACT AND LIGHTWEIGHT**
- **EXCEPTIONAL OPERATOR COMFORT**

COMPACT TRACK LOADER

SVL65-2S

Engine gross horsepower (SAE J 1995): 68.4 HP (51.0 kW)
Rated operating capacity (35% of tipping load): 953 kg
Rated operating capacity (50% of tipping load): 1361 kg
Bucket breakout force: 2093 kg
Operating weight (closed cab, including operator weight 75 kg): 3915 kg







Advanced Multifunction Valve (AMV)

The SVL65-2S's hydraulic system features an Advanced Multifunction Valve that provides smooth movements when hydraulic functions are operated simultaneously. The AMV now allows operators to run the AUX hydraulics, bucket, and loader arm functions together.



KUBOTA PRODUCTIVITY

Excellent Workability

Outstanding Kubota Vertical Lift

Easily dump into dumpster or truck, thanks to Kubota's outstanding vertical lift. It raises the bucket even higher (3010 mm at the hinge pin) without sacrificing any of the SVL65-2S's exceptionally long reach (886 mm).


Standard Self-leveling Function

This feature helps keep the bucket or fork in a horizontal position without the need to manually adjust the angle during lifting. Can be turned on or off with click of a switch.



Electronic Travel Torque Management

The Electronic Travel Torque Management System lets you work faster. The ECU constantly monitors the load of the machine to optimize hydraulic pump output for smoother operation that keeps the engine running to get the job done.



Kubota Engine

Powerful Kubota Engine

A reliable 68 HP* Kubota engine brings plenty of power to any excavating or loading job, letting you work faster and with greater efficiency.

* Engine HP Gross (SAE J1995)

Common Rail System

The Common Rail System (CRS) electronically controls the fuel injection timing to optimize the fuel consumption.

Travel Performance

Standard Two-speed Travel

With a maximum top speed of 7.8 km/h in low gear, and 11.5 km/h in high gear to get the job done faster.

High Ground Clearance


A high ground clearance of 233 mm lets you travel over large obstacles with ease.

Track Response

Operators can now change the sensitivity of their machine control response through the LCD panel. The SVL65-2S offers you a choice of three track response settings: Mild, Normal, and Quick.

Auto-Shift

Auto shift allows machines to turn smoothly. The ECU is constantly monitoring the traction load. When the traction load gets high while turning, but before the machine starts to lose traction, it automatically shifts down for better low-range torque. Once the traction load is eased, it shifts back up automatically for high speed.

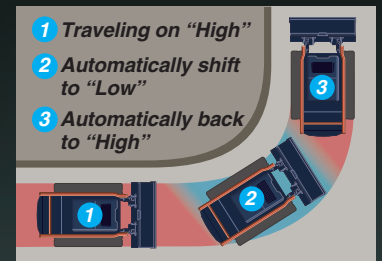

EXCEPTIONAL COMFO



Sliding Front Door

Kubota's traditional slide up front door can be opened regardless of the position of the bucket or loader arms. This allows for machine operation with the door open if desired.

Highback seat (Standard)

The SVL65-2S comes standard with a high back seat that will help to support your body and ease your fatigue.

Plenty of Legroom

The SVL65-2S's cab provides plenty of leg and foot room. The floor mat can be removed for cleaning, and a small opening in the floor allows easy removal of dirt and debris.



LED Work Lights (Front and Rear)

LED lights allow for excellent visibility in low-light conditions.

Wide Cab Entrance

A wide entrance makes it easier to get in and out.

A/C Performance

Optimized Air Conditionning

The climate control system provides an optimized airflow for outstanding cooling and heating performance and supreme operator comfort all year round.

Roomy and Clean Cab

With a large and comfortable operator's station, the SVL65-2S offers an extra level of comfort and convenience.



* Air suspension with heater is available only through the option kit.

Technology

Color LCD Touch Panel with Jog Dial

The SVL65-2S's digital color LCD Touch Panel builds on the success of the Kubota's Intelligent Control System by providing a wide range of functions to keep you aware of the SVL65-2S's operating status at all times. This panel features touch and jog dial enabled controls for quickly selecting operations and functions, as well as easy-to-read indicators and alerts. The panel is positioned to the front right of the operator for excellent visibility and fast access.



A. Situation Indicator (such as working function, battery charge indicator etc..) **B.** Hydraulic Oil Temperature **C.** Coolant Temperature **D.** AUX Mode **E.** Fuel Level **F.** Menu Icons



Rear View Camera

The standard rear view camera allows for better rear visibility on the job site. The rear view can be set to display continuously or only when in reverse.



Keyless Engine Start

The machine is accessed by entering a 4-digit passcode on the LCD Touch Panel, allowing the engine to be started with the touch of a button. With the ability to set up to 51 user passcodes, lost keys will be a thing of the past.



Radio with Bluetooth®

Standard on Closed Cab units, our integrated Bluetooth® radio allows for seamless streaming and hands free calling.



EASY MAINTENANCE

Slide and Tilt Radiator and Oil Cooler

Both the radiator and the oil cooler quickly slide forward and tilt downwards, helping to ensure access to other engine parts during maintenance.



- A. Dual Element Air Cleaner
- B. Fuel Filter
- C. Water Separator
- D. Battery
- E. Coolant
- F. Radiator

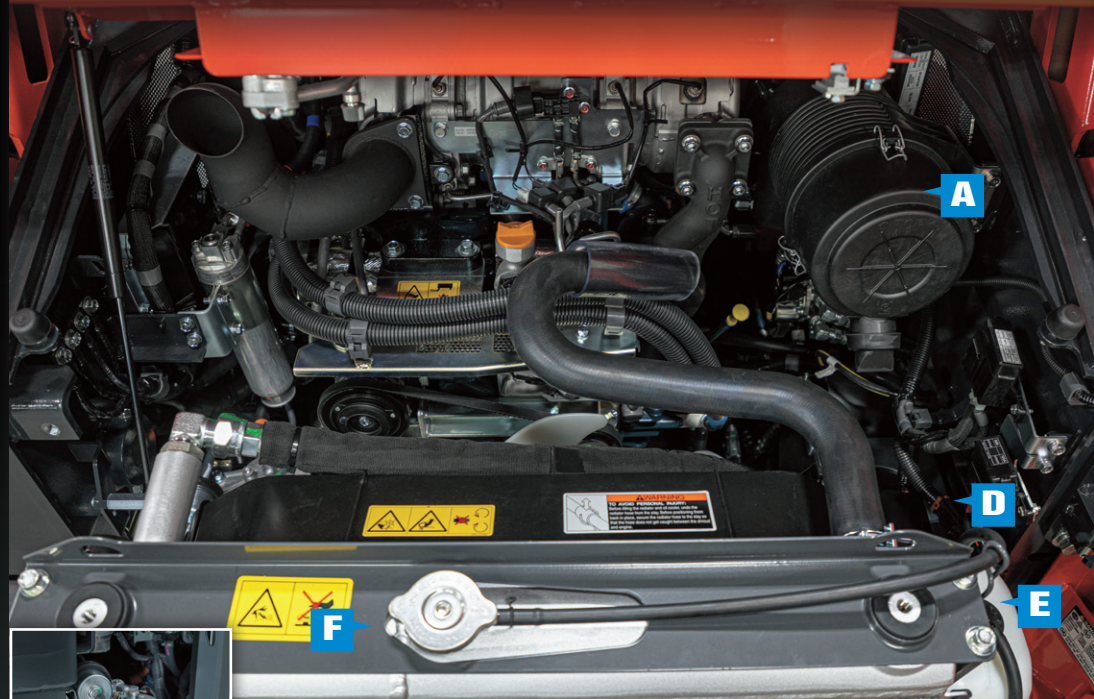

Tilt-up Cabin

The cab can be tilted 72°, without having to lift the arm, allowing easy access to the hydraulic pumps, valves, lines and hydraulic tank.

Bolt on Handrails

The handrails are bolted to the cab to allow for quick and easy replacement in the event they get damaged.





Impressive Durability

Welded Mainframe and Under Carriage

1. Welded, Integrated Mainframe and Undercarriage



The undercarriage forms an integral part of the main frame for maximum durability.

2. Kubota Original Rubber Tracks

Kubota genuine rubber tracks support your works. We offer 320 mm and 380 mm wide tracks from the factory option.

3. Triple Flange Lower Track Rollers

A reliable triple flange design helps minimize the chance of detracking and helps improve stability. They are sealed and kept lubricated.

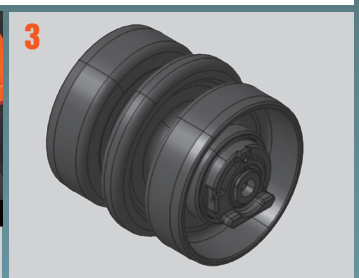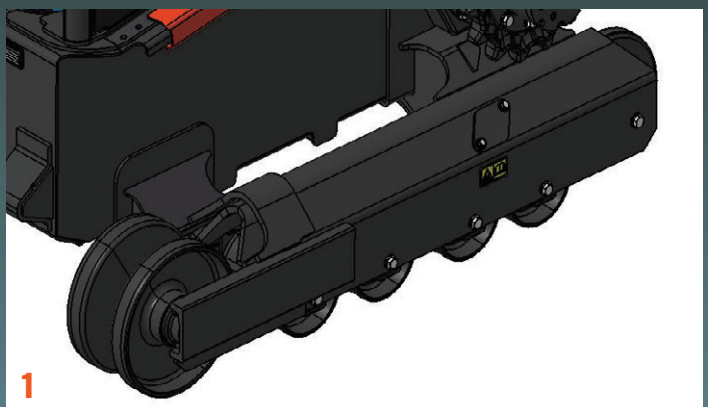

COMFORT MEETS CONVENIENCE

New Jog Dial and Switches

The jog dial and switches are well laid out and intuitively labeled. Panel is back lit making easy to find the button you need in dark conditions.

- A.** Home switch
- B.** Return switch
- C.** Jog dial
- D.** Self leveling switch
- E.** Working light switch
- F.** Beacon light (Opt.) switch
- G.** Washer switch (Closed Cab only)
- H.** Hydraulic unlock switch
- I.** Parking brake switch
- J.** AUX port switch
- K.** Wiper switch (Closed Cab only)



Multi-function Levers

The multi-function levers provide fingertip control of all major vehicle and attachment operations, letting you keep both hands on the levers at all times for optimal operating efficiency. Standard on High-flow models, these levers can also be installed as a kit on Standard flow models.

Left Control Lever



- A.** Horn
- B.** -Not used-
- C.** AUX1
- D.** AUX3
- E.** Travel Speed

Right Control Lever



- F.** Proportional AUX Switch
- G.** AUX Hold Switch
- H.** AUX2
- I.** AUX Mode Change
- J.** Float Switch



ATTACHMENT

Kubota by Land Pride CE Attachments are performance matched to your Kubota SVL Series. This process helps to ensure that the hydraulic requirements, weight, and width of your attachment matches your power unit's exact specifications.

SKID CUTTERS



SKID GRADERS



POWERED RAKES



COMBO BUCKETS



ANGLE BROOMS



HOPPER BROOMS



PALLET FORKS



Augers	Loader Boom
Trenchers	Primary Seeder
6-Way Dozer Blades	Skid Tiller
4 in 1 Buckets	Cold Planers
Claw Grapple	
Heavy-Duty Buckets	
Buckets	

SCAN TO VIEW
the complete range of
performance matched
attachments at
landpride.com



EQUIPMENT

STANDARD EQUIPMENT

- Closed CAB (w/ air conditioning)
- Radio with bluetooth (Closed CAB)
- Top / Rear window
- 2" Retractable seat belt
- Operator presence control
- Pull down arm rest
- LCD touch panel with jog dial
- Rear view camera
- Keyless engine start
- Backup alarm
- LED work lights (Front 2 / Rear 2)
- 12V electric outlet
- USB port
- Glow plug
- Hydraulic quick coupler
- Loader arm float function
- Bucket self-leveling (up only)
- Auto-shift
- Track Response
- Wet disc parking brake
- Dial and Foot throttle
- Horn
- Two-speed travel
- Lockable fuel cap
- Rubber crawler (320mm)

OPTIONAL EQUIPMENT

- High-flow hydraulics (1/2" and 3/4" couplers)*
- 14-pin coupler (standard on high flow model)
- Rubber crawler (380mm)*
- Air Suspension Seat with Heater
- Kubota Shockless Ride (KSR)
- Polycarbonate door
- Rear bonnet lock Kit
- 3" Retractable seat belt
- Rear view mirror
- Radiator screen
- ...and much more.


*Factory Option

Specifications

Model				SVL65-2S	
Type of operator station				Closed CAB	
Engine	Model			V2607-CR-TE4	
	Output (SAE J1995 gross)		HP (kW)/rpm	68.4 (51.0) / 2600	
	Output (SAE J1349 net)		HP (kW)/rpm	59.9 (44.7) / 2600	
	Displacement		cc	2615	
	Cylinders			4	
	Bore × Stroke		mm	87 × 110	
	Aspiration			Turbocharged	
Loader Performance	Rated operating capacity-35% tipping load		kg	953	
	Tipping load		kg	2722	
	Breakout force	Bucket	kg	2093	
		Lift arm	kg	1935	
	Lift arm path			Vertical	
Undercarriage	Track Width	Standard	mm	320	
		Wide	mm	380	
	Ground pressure	Standard	psi	5.4	
		Wide	psi	4.4	
	Track rollers (per side)			4	
	Travel speed	Low	km/h	7.8	
		High	km/h	11.5	
	Traction force		kgf	3813	
Min. ground clearance		mm	233		
Hydraulic system	Aux. hydraulic flow	Std. / High Flow	ℓ /min.	65.8 / 102.2	
	Aux. hydraulic pressure		kgf/cm²	230	
Service refill capacities	Hydraulic system		ℓ	48	
	Hydraulic tank		ℓ	20	
	Fuel tank		ℓ	82	
Operating weight (Includes operator weight 165lbs.)			kg	3915	

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications.

Dimensions

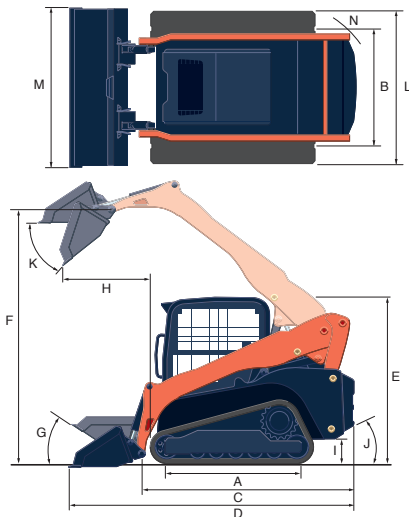

Model			SVL65-2S
A	Length of track on ground	mm	1470
B	Track gauge	mm	1337
C	Length w/o bucket	mm	2725
D	Length w/bucket on ground	mm	3465
E	Height to top of cab	mm	2029
F	Bucket hinge pin height at max. lift	mm	3010
G	Rollback angle at carry position	degree	30
H	Reach at max. lift and dump	mm	886
I	Ground clearance	mm	233
J	Departure angle	degree	30
K	Max. dump angle	degree	40
L	Vehicle width Standard track / Wide track	mm	1657 / 1717
M	Width with bucket	mm	1727 / 1880
N	Turning radius from center-machine rear	mm	1451



©2025 Kubota Corporation

Kubota Australia Pty Ltd

25-29 Permas Way, Truganina VIC, 3029 Australia
 Freecall: 1800-334-653
 Email: sales@kubota.com.au

Web Site: <http://www.kubota.com.au>

Kubota New Zealand Limited

433 Rangitikei Street, Cloverlea, Palmerston North, 4412 New Zealand
 Freecall: 0800-582-682
 Email: sales@kubota.com.au

Web Site: <http://www.kubota.co.nz>

**Kubota
Genuine Parts**
 for excellent
 performance,
 durability and
 safety

